




## TANDBERG Video Communication Server

The TANDBERG Video Communication Server bridges the gap between SIP and H.323 and delivers three unique applications in one centralized device. It features innovative video call forwarding capabilities through TANDBERG FindMe™ and extends SIP support to network administration and firewall traversal.

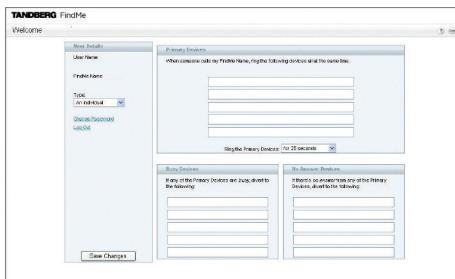

FindMe™ user interface

#### DESIGN FEATURES

- Designed to work with any H.323 or SIP device
- Appliance-based architecture allows for easy deployment and high reliability
- Designed to work with any firewall
- Full multi vendor support
- Secure and reliable
- 1U rack mountable

#### APPLICATION FEATURES

- Firewall Traversal H.460.18/19 Compliant including support for Multiplexed Media
- Firewall Traversal STUN Compliant
- Traverse any number of firewalls
- Flexible zone configuration with named zones and default zone
- Supports inter- and intra-zone bandwidth control
- Provides IPv4/v6 Translation Services
- Policy Engine for processing calls
- URI and ENUM Dialing
- Device authentication using H.235
- Embedded setup wizard for easy installation

#### PERFORMANCE FEATURES

- Supports up to 2500 registered devices and 100 concurrent traversal calls
- Up to 200 neighboring zones (traversal zones included)
- Allows URI dialing for massive scalability
- HTTPS, SSH, and SCP for secure management
- Uses compact flash for critical storage and a hard drive for other functions

PROTECT YOUR TECHNOLOGY INVESTMENT WITH  
 TANDBERG'S PORTFOLIO OF **CONSTANT CARE SERVICES**.  
 VISIT [WWW.TANDBERG.COM](http://WWW.TANDBERG.COM)

## TANDBERG VCS MAIN FEATURES

H.323 gatekeeper  
SIP Proxy/Registrar  
SIP and H.323 support, including SIP/H.323 gatewaying for locally registered endpoints  
IPv4 and IPv6 support, including IPv4/IPv6 gatewaying  
Bandwidth management on both a per-call and a total usage basis, configurable separately for calls within the local subzones and to neighboring systems and zones  
Automatic downspeeding option for calls that exceed the available bandwidth  
URI and ENUM dialing via DNS, enabling global connectivity  
Up to 2500 registrations  
Up to 500 non-traversal calls  
Up to 100 traversal calls  
Up to 200 neighboring zones  
Flexible zone configuration with prefix, suffix and regular expression support  
Can function as a standalone VCS or be neighbored with other systems such as VCSs, Border Controllers, Gatekeepers and SIP proxies  
Supports up to 5 Alternate VCSs for redundancy purposes  
Optional endpoint authentication  
Control over which endpoints that are allowed to register  
Administrator Policy including support for CPL  
Embedded setup wizard via a serial port for initial configuration  
System administration via a web interface or RS-232, Telnet, SSH, and HTTPS  
Can be managed with TANDBERG Management Suite 11.8 or newer

## OPTIONAL FEATURES

Firewall traversal server (Border Controller) functionality, allowing secure traversal of any firewall or NAT  
Registration of traversal-enabled endpoints  
STUN Discovery and STUN Relay services  
User Policy (TANDBERG FindMe)  
SIP/H.323 gatewaying for non-registered endpoints

## ARCHITECTURE

Secure appliance based architecture  
Flash memory and hard drive  
ITU-T H.323 v5 compliant  
ITU-T H.225 v4 compliant  
TANDBERG Expressway Technology  
H.323 v5 Annex O (for DNS dialing support)  
H.460.18/.19 compliant  
H.460.18 client proxy support  
Supports H.460.19 multiplexed media

## RELIABILITY

Registrations survive system restart  
Fast start-up time  
Border Controller process recycling within seconds  
H.225 Alternate Gatekeeper Support

## SECURITY

Secure Management with HTTPS, SSH, and SCP  
– Secure File Transfer  
– Inactivity Timeout  
Can lock-down IP services  
Authentication required on HTTP(S), Telnet, SSH, SCP, and serial port  
Compatible with H.235 v2 and v3 enabled H.323 devices  
H.235 Authentication support  
TLS for SIP signaling

## MANAGEMENT

Supports industry standards such as RS-232, Telnet, HTTP(S), XML, SNMP, SCP, and SSH  
Embedded setup wizard on serial port for initial configuration  
Advanced management support and configuration with TANDBERG Management Suite 11.8 or newer  
Call logging and diagnostics  
Support for logging to a syslog server  
Local time zone aware

## CALL CONTROL AND REGISTRATIONS

Supports manual registration of H.323 and SIP endpoints and API call control  
Supports H.225/Q.931, H.245 call control routed mode  
Registration of H.323 ID, E.164 aliases and services  
Supports Unicode (UTF-8) registration for global implementation  
Disconnect H.323 calls from the API interface  
URI Dialing  
Up to 100 traversal calls  
Up to 100 services for a single device  
Up to 2500 registered Expressway Devices  
Direct call signaling between neighbored VCSs, border controllers and gatekeepers  
Call Policy Management (RFC 3880) including Administrator Policy and User Policy (FindMe)

## ZONE CONTROL

Supports Remote Z one monitoring  
Supports Remote Z one redundancy  
Supports up to 200 neighboring zones (including VCSs, Border Controllers, gatekeepers and SIP proxies)  
Supports sub-zone area definition for bandwidth management  
Flexible zone configuration with named zones and default zone  
Supports forwarding of requests to neighbor zones (including VCSs, border controllers, gatekeepers and SIP proxies)  
Can disable automatic discovery and forwarding of LRQ's  
Registration Control (open, specifically allow, specifically deny)

## BANDWIDTH MANAGEMENT

Interzone — definable call by call  
– Max bandwidth per call  
– Max aggregate bandwidth for all neighboring zones  
Intrazone — definable call by call  
– Max bandwidth per call  
– Max aggregate bandwidth  
Auto downspeeding if call exceeds per-call maximum  
Gateway load balancing

## INTERFACES

4x LAN/Ethernet (RJ-45) 1000BASE-T ports (front)  
1x RS232 shielded RJ-45 console port (front)  
1x USB (rear)

## POWER

Auto-sensing 250W (Max) power supply  
90–264V AC full range @ 47–63Hz

## COOLING SYSTEM

Two 40mm fans for system cooling

## SYSTEM CONTROL AND INDICATIONS

1x Power LED  
1x Power on/off switch (rear)  
3x Act/Link/10/100 LEDs on RJ-45  
3x Act/Link/10/100 LEDs on RJ-45

## NETWORK

Supports DNS Addressing  
Supports IPv4 and IPv6 simultaneously  
Provides IPv4/v6 Translation Services

## APPROVALS

Directive 73/23/EEC (Low Voltage Directive)  
– Standard EN 60950  
Directive 89/336/EEC (EMC Directive)  
– Standard EN 55022, Class A  
– Standard EN 55024  
– Standard EN 61000-3-2/-3-3  
Approved according to UL 60950 and CAN/CSA C22.2 No. 60950  
Complies with FCC15B Class A

## DIMENSIONS

426(W) x 228.6(D) x 43.5(H) mm (16.8" x 9" x 1.72")  
1U rack-mount chassis

## ENVIRONMENT

Operating temperatures: 0° C to 40° C (32° F to 104° F)  
Storage temperatures: -20° C to 80° C (-4° F to 140° F)  
Relative humidity: 10% to 90% (Non-condensing)

## CERTIFICATION

LVD 73/23/EC  
EMC 89/366/EEC


*All specifications subject to change without notice, system specifics may vary.*

*All images in these materials are for representational purposes only, actual products may differ.*

*TANDBERG, Expressway and FindMe are registered trademarks or trademarks of TANDBERG in the U.S. and other countries.*

*All other trademarks are property of their respective owners.*

## ENTERPRISE LAN/WAN

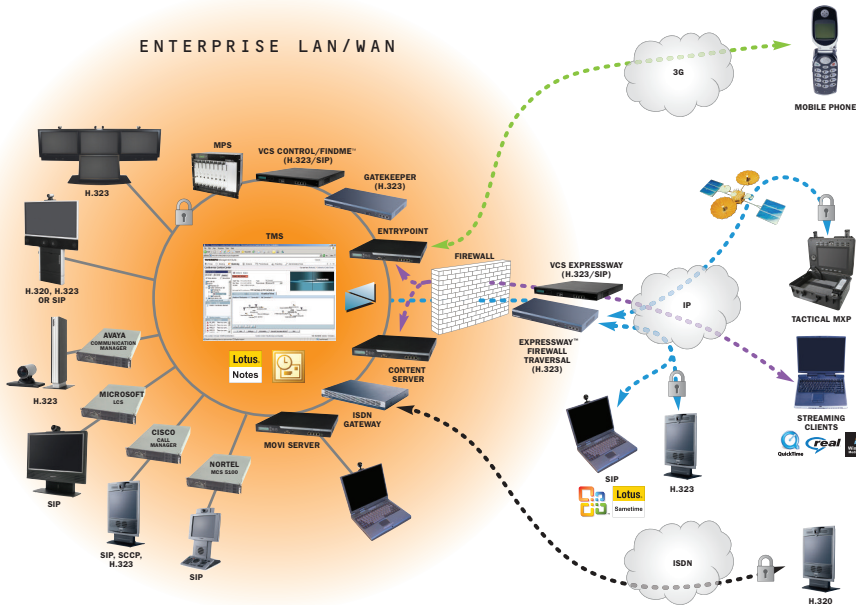

## TANDBERG

# Video Communication Server

TANDBERG WORLD HEADQUARTERS  
Philip Pedersens vei 20  
1366 Lysaker, Norway  
Tel: +47 67 125 125  
Fax: +47 67 125 234  
Video: +47 67 126 126  
tandberg@tandberg.com

1212 Avenue of the Americas,  
24<sup>th</sup> Floor  
New York, NY USA 10036  
Tel: +1 212 692 6500  
Fax: +1 212 692 6501  
Video: +1 212 692 6535  
tandberg@tandberg.com

July 2007